


Technical Note

C-Face Dimensions – DR Motor

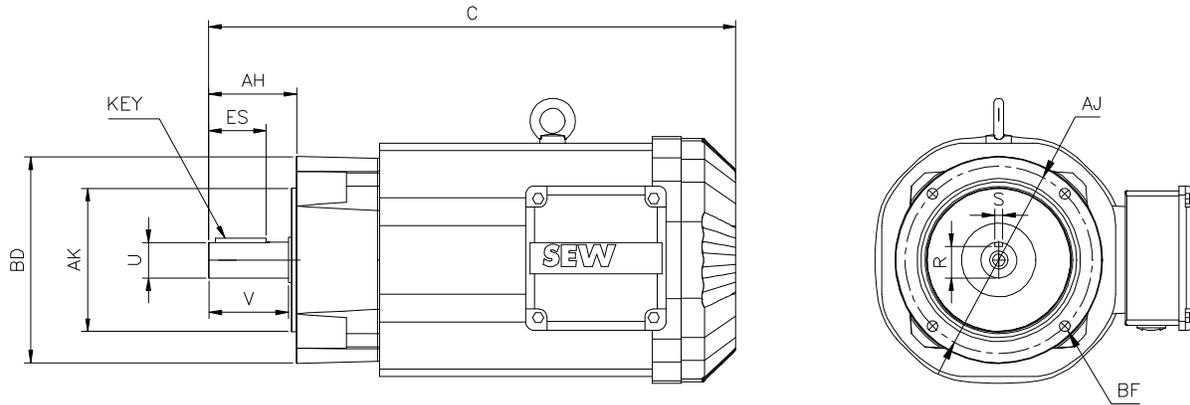

NEMA Frame	Motor type	AJ	BD	AK + 0.0 -0.003	U + 0.0 -0.0005	V	C	AH	BF thread	S	R	Key	ES
56	DRS71S	5-7/8	6-1/2	4-1/2	5/8	1-7/8	9.65	2-1/16	3/8-16	3/16	0.51	3/16 x 3/16 x 9/16	1.53
56	DRS71M	5-7/8	6-1/2	4-1/2	5/8	1-7/8	10.64	2-1/16	3/8-16	3/16	0.51	3/16 x 3/16 x 9/16	1.53
56	DRS80M DRE80M	5-7/8	6-1/2	4-1/2	5/8	1-7/8	12.57	2-1/16	3/8-16	3/16	0.51	3/16 x 3/16 x 9/16	1.53
143/ 145T	DRS80S	5-7/8	6-1/2	4-1/2	7/8	2-1/4	11.72	2-1/8	3/8-16	3/16	0.77	3/16 x 3/16 x 9/16	1.53
143/ 145T	DRS80M DRE80M	5-7/8	6-1/2	4-1/2	7/8	2-1/4	12.94	2-1/8	3/8-16	3/16	0.77	3/16 x 3/16 x 9/16	1.53
143/ 145T	DRS90M DRE90M DRP90M	5-7/8	6-1/2	4-1/2	7/8	2-1/4	12.75	2-1/8	3/8-16	3/16	0.77	3/16 x 3/16 x 9/16	1.53
143/ 145T	DRE90L DRP90L	5-7/8	6-1/2	4-1/2	7/8	2-1/4	13.54	2-1/8	3/8-16	3/16	0.77	3/16 x 3/16 x 9/16	1.53
182/ 184T	DRS90L DRE90L	7-1/4	8-7/8	8-1/2	1-1/8	2-3/4	14.04	2-7/8	1/2-13	1/4	0.99	1/4 x 1/4 x 13/16	1.89
182/ 184T	DRS100M DRE100M	7-1/4	8-7/8	8-1/2	1-1/8	2-3/4	15.22	2-7/8	1/2-13	1/4	0.99	1/4 x 1/4 x 13/16	1.89
182/ 184T	DRE100L DRE100LC	7-1/4	8-7/8	8-1/2	1-1/8	2-3/4	16.40	2-7/8	1/2-13	1/4	0.99	1/4 x 1/4 x 13/16	1.89

Dimensions in inch